

saferrich



COMPANY PROFILE



Shandong Fengyuan Tire Manufacturing Co., Ltd was established in 2007, with a total investment 2.5 Billion RMB , located in Yicheng economic development zone, Zaozhuang, Shandong. The overall plan of annual output is 20 million PCR, UHP, SUV, LTR and winter tires.

All equipments used in Fengyuan factory have to be supervised by first-rate European technology team who has more than 80 years experience in R&D. Fengyuan adheres to the strict quality control following the pundit ISO/TS 16949. The technology has met the requirements of European Labeling Act. Its products are in great demand at high-end markets, superb in quality, energy saving and Eco-friendly.



Feng yuan has received the certificate from DOT, ECE (LABEL & REACH), CCC, GCC, INMETRO, SONCAP, etc.

Fengyuan company is committed to supplying high quality and safe tires to satisfy customers. Fengyuan is actively exploring the local and international markets under the philosophy of building a long-term, stable, win-win cooperative partnership.



【Professional Focused】

Advanced Equipment And Advanced Production Line



Certification



Run-flat Tire

Based on high performance tires, run-flat tires are added with high hardness rubber on shoulder, which can be used in sudden extreme conditions, such as pressure lost, protecting your journey.



Carbon Nano-tubes Tire The Green Revolution Of Tire

The tire's comprehensive performance got greatly improved by using carbon nano-tubes material.




Carbon nano-tubes
compound identifying

Tire features with carbon nano-tubes compound:

1. Low rolling resistance, more fuel-efficient eco-friendly
2. No static, more safety;
3. High speed performance;
4. Lower tread temperature and longer service life.

Comparison of performance:

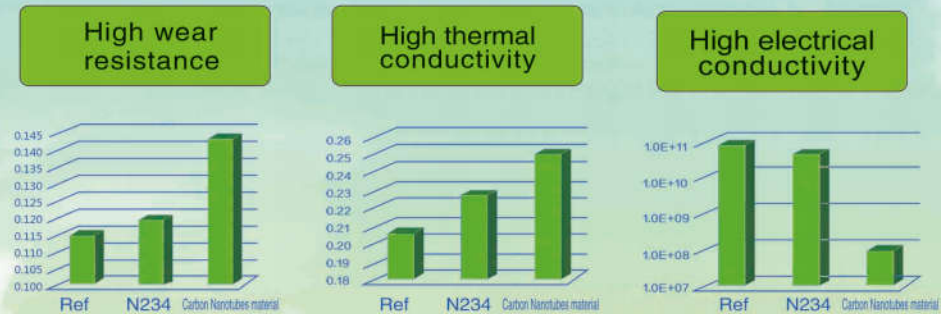

Puncture Resistance Tire

Based on HP and UHP tires, puncture resistance tires has high stability, and its high viscous liquid coating effectively reduces the damage of puncture, improving air retention performance, ensuring the usage under harsh terrain conditions.



PRODUCT POSITIONING FIGURE



PCR

FRC16

FRC18

FRC26

FRC66

FRC76

FRC78

FRC79

FRC86


FRC96



FRC16 HP TIRE

Design Features

Performance Test

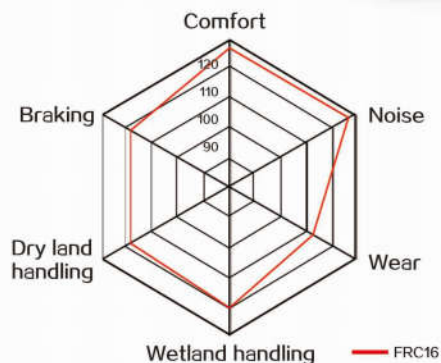

Product features



Criss-cross grooves design:

Criss-cross grooves design enhance water evacuation, effectively prevent tire lateral slip on wet road.



Central wide rib design:

Central rib combined with horizontal grooves provides nice stability, excellent acceleration and brake performance at high speed.



FRC16 HP TIRE


SIZE	Load Index	Speed Rating	Standard Rim	Dwell Diameter (mm)	Section Width (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
165/70R13	79	T	5J	562	170	437	300	380AA
165/70R13	79	H	5J	562	170	437	300	380AA
165/80R13	83	T	4 1/2, 4.50B	594	165	487	300	380AA
175/60R13	77	H	5J, 5.00B	540	177	412	300	380AA
175/70R13	82	T	5J	576	177	475	300	380AA
175/70R13	82	H	5J	576	177	475	300	380AA
165/65R14	79	H	5J	570	170	437	300	380AA
165/65R14	79	T	5J	570	170	437	300	380AA
175/65R14	82	T	5J	584	177	475	300	380AA
175/65R14	82	H	5J	584	177	475	300	380AA
175/65R14	86/XL	T	5J	584	177	530	340	380AA
175/65R14	86/XL	H	5J	584	177	530	340	380AA
175/70R14	84	T	5J	602	177	500	300	380AA
175/70R14	84	H	5J	602	177	500	300	380AA
185/60R14	82	H	5 1/2	578	189	475	300	380AA
185/65R14	86	T	5 1/2	596	189	530	300	380AA
185/65R14	86	H	5 1/2	596	189	530	300	380AA
185/70R14	88	T	5 1/2	616	189	560	300	380AA
185/70R14	88	H	5 1/2	616	189	560	300	380AA
195/60R14	86	H	6J	590	201	530	300	380AA
195/65R14	89	H	6J	610	201	580	300	380AA
195/70R14	91	T	6J	630	201	615	300	380AA
195/70R14	91	H	6J	630	201	615	300	380AA
195/70R14	95/XL	H	6J	630	201	690	340	380AA
205/60R14	88	H	6J	602	209	560	300	380AA
205/70R14	98/XL	T	6J	644	209	750	340	380AA
175/60R15	81	H	5J	591	177	462	300	380AA
175/65R15	84	H	5J	609	177	500	300	380AA
185/55R15	82	V	6J	585	194	475	300	380AA
185/60R15	84	H	5 1/2	603	189	500	300	380AA
185/60R15	88/XL	H	5 1/2	603	189	560	340	380AA
185/65R15	88	T	5 1/2	621	189	560	300	380AA
185/65R15	88	H	5 1/2	621	189	560	300	380AA
195/50R15	82	V	6J	577	201	475	300	380AA
195/55R15	85	V	6J	595	201	515	300	380AA
195/60R15	88	H	6J	615	201	560	300	380AA
195/60R15	88	V	6J	615	201	560	300	380AA
195/65R15	91	H	6J	635	201	615	300	380AA
195/65R15	91	V	6J	635	201	615	300	380AA
205/60R15	91	H	6J	627	209	615	300	380AA
205/60R15	91	V	6J	627	209	615	300	380AA
205/65R15	94	H	6J	647	209	670	300	380AA
205/65R15	94	V	6J	647	209	670	300	380AA
205/70R15	96	H	6J	669	209	710	300	380AA
215/65R15	100/XL	H	6 1/2	661	221	800	340	380AA
215/65R15	96	H	6 1/2	661	221	710	300	380AA
215/70R15	98	T	6 1/2	683	221	750	300	380AA
225/70R15	100	H	6 1/2	697	228	800	300	380AA
195/50R16	84	H	6J	602	201	500	300	380AA
195/50R16	84	V	6J	602	201	500	300	380AA
195/55R16	87	H	6J	620	201	545	300	380AA
195/55R16	87	V	6J	620	201	545	300	380AA
205/50ZR16	87	W	6 1/2	612	214	545	300	380AA
205/55R16	91	V	6 1/2	632	214	615	300	380AA
205/55ZR16	91	W	6 1/2	632	214	615	300	380AA
205/55ZR16	94/XL	W	6 1/2	632	214	615	340	380AA
205/60R16	92	H	6J	652	209	630	300	380AA
205/60R16	92	V	6J	652	209	630	300	380AA
205/65R16	95	V	6J	672	209	690	300	380AA
215/55ZR16	97/XL	W	7J	642	226	730	340	380AA
215/60R16	95	H	6 1/2	664	221	690	300	380AA
215/60R16	95	V	6 1/2	664	221	690	300	380AA
215/65R16	98	H	6 1/2	686	221	750	300	380AA
225/50ZR16	92	W	7J	632	233	630	300	380AA
225/50ZR16	96/XL	W	7J	632	233	710	340	380AA
225/55ZR16	99/XL	W	7J	654	233	775	340	380AA
225/60R16	98	H	6 1/2	676	228	750	300	380AA
225/60R16	102/XL	H	6 1/2	676	228	850	340	380AA



FRC18 HP TIRE

Design Features

Performance Test

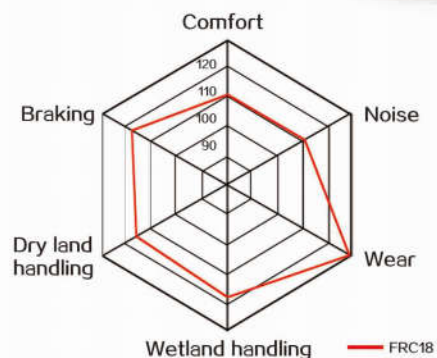

Product features



Advanced structure design:

Using new type nylon cap layer which is intact and no joints, effectively prevent belt from sliding, provide perfect stability performance even in the status of turning at high speed.



Excellent wear-resistance compound technology

Optimized wear-resistance compound make tires to be suitable for rough road, longer mileage, energy saving and Eco-friendly.



FRC18 HP TIRE

SIZE	Load Index	Speed Rating	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)	Max. Pressure (kgf)	UTQG
165/65R13	77	T	5.00B	544	170	412	250	460AA
165/70R13	79	T	5.00B	562	170	437	250	460AA
175/70R13	82	T	5.00B	576	177	475	250	460AA
185/70R13	86	T	5.50B	590	189	530	250	460AA
165/70R14	81	H	5J	588	170	462	250	460AA
175/65R14	82	H	5J	584	177	475	250	460AA
175/70R14	84	T	5J	602	177	500	250	460AA
175/70R14	84	H	5J	602	177	500	250	460AA
185/60R14	82	H	51/2J	578	189	475	250	460AA
185/70R14	88	T	51/2J	616	189	560	250	460AA
185/80R14	91	T	5J	652	184	615	240	460AA
195/60R14	86	H	6J	590	201	530	250	460AA
195/70R14	91	H	6J	630	201	615	250	460AA
195/60R15	88	H	6J	615	201	560	250	460AA
195/65R15	91	H	6J	635	201	615	250	460AA




FRC26 UHP TIRE

Design Features



Performance Test

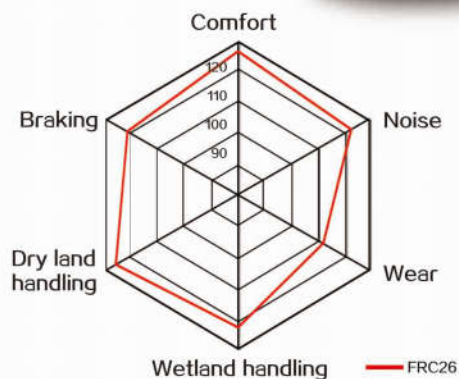

Product features



Asymmetric tread design:
Four wide grooves design provide effective drainage and sufficient wet safety performance.



Innovative Technology:
Willow leaf-shaped biomimetic tread block design. Adopting willow-shaped biomimetic pattern block design inside, effectively prevent abnormal wear of pattern block corners. Together with "S" shaped on tread grooves, bring soft, silence and comfort.



FRC26 UHP TIRE

SIZE	Load Index	Speed Rating	Standard Run	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
195/50R15	82	V	6J	577	201	475	300	320AA
195/55R15	85	V	6J	595	201	515	300	320AA
195/45R16	84 XL	V	6½J	582	195	500	340	320AA
205/45ZR16	87/XL	W	7J	590	206	545	340	320AA
205/50ZR16	91/XL	W	6½J	612	214	615	340	320AA
205/55ZR16	91	V	6½J	632	214	615	300	320AA
205/55ZR16	91	W	6½J	632	214	615	300	320AA
215/55ZR16	97/XL	W	7J	642	226	730	340	320AA
225/50ZR16	96/XL	W	7J	632	233	710	340	320AA
225/55ZR16	99/XL	W	7J	654	233	775	340	320AA
205/40ZR17	84/XL	W	7½J	596	212	500	340	320AA
205/45ZR17	88/XL	W	7J	616	206	560	340	320AA
205/50ZR17	93/XL	W	6½J	638	214	650	340	320AA
215/40ZR17	87/XL	W	7½J	604	218	545	340	320AA
215/45ZR17	91/XL	W	7J	626	213	615	340	320AA
215/50ZR17	95/XL	W	7J	648	226	690	340	320AA
215/55ZR17	98/XL	W	7J	668	226	750	340	320AA
225/45ZR17	94/XL	W	7½J	634	225	670	340	320AA
225/50ZR17	98/XL	W	7J	658	233	750	340	320AA
225/55ZR17	101/XL	W	7J	680	233	825	340	320AA
235/45ZR17	97/XL	W	8J	644	236	730	340	320AA
235/55ZR17	103/XL	W	7½J	690	245	875	340	320AA
245/45ZR17	99/XL	W	8J	652	243	775	340	320AA
215/35ZR18	84/XL	W	7½J	607	218	500	340	320AA
225/40ZR18	92/XL	W	8J	637	230	630	340	320AA
225/45ZR18	95/XL	W	7½J	659	225	690	340	320AA
235/40ZR18	95/XL	W	8½J	645	241	690	340	320AA
235/45ZR18	98/XL	W	8J	669	236	750	340	320AA
235/50ZR18	101/XL	W	7½J	693	245	825	340	320AA
245/40ZR18	97/XL	W	8½J	653	248	730	340	320AA
245/45ZR18	100/XL	W	8J	677	243	800	340	320AA
255/45ZR18	103/XL	W	8½J	687	255	875	340	320AA
255/35ZR18	94 XL	Y	9J	635	260	670	340	320AA
235/55ZR18	104 XL	W	7½J	715	245	900	340	320AA
265/35ZR18	97 XL	Y	9½J	643	271	730	340	320AA
225/35ZR19	88/XL	W	8J	641	230	560	340	320AA
235/35ZR19	91/XL	W	8½J	647	241	615	340	320AA
245/35ZR19	93/XL	W	8½J	655	248	650	340	320AA
245/45ZR19	102/XL	W	8J	703	243	850	340	320AA
225/35ZR20	90/XL	W	8J	666	230	600	340	320AA
235/35ZR20	92/XL	W	8½J	672	241	630	340	320AA
245/35ZR20	95/XL	Y	8½J	680	248	690	340	320AA
265/50ZR20	111/XL	V	8½J	774	277	1090	340	320AA
275/40ZR20	106/XL	W	9½J	728	278	950	340	320AA




FRC66

ALL SEASON SUV TIRE

Design Features



Performance Test

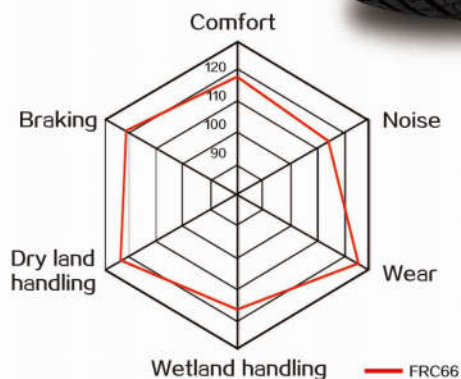

Four wide grooves design provide effective drainage and sufficient wet safety performance.



Design of central rib with sipes promotes the rigidity, help to balance high-speed performance and grip performance on wet land.



The compact shoulder design provide excellent handling performance with low noise.



Multiple blade groove pattern provide excellent grip and handling performance on wet land.



FRC66 ALL SEASON SUV TIRE

SIZE	Load Index	Speed Rating	Standard Rims	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
215/75R15	100	T	6J	703	216	800	300	440AA
225/75R15	102	T	6J	719	223	850	300	440AA
215/65R16	98	H	6 1/2J	686	221	750	300	440AA
215/70R16	100	T	6 1/2J	708	221	800	300	440AA
225/70R16	103	T	6 1/2J	722	228	875	300	440AA
235/60R16	100	H	7J	688	240	800	300	440AA
235/60R16	100	V	7J	688	240	800	300	440AA
235/70R16	106	T	7J	736	240	950	300	440AA
245/70R16	107	T	7J	750	248	975	300	440AA
255/65R16	109	H	7 1/2J	738	260	1030	300	440AA
255/70R16	111	T	7 1/2J	764	260	1090	300	440AA
265/70R16	112	T	8J	778	272	1120	300	440AA
275/70R16	114	T	8J	792	279	1180	300	440AA
275/70R16	114	H	8J	792	279	1180	300	440AA
215/60R17	96	H	6 1/2J	690	221	710	300	440AA
225/65R17	102	H	6 1/2J	724	228	850	300	440AA
225/65R17	106/XL	H	6 1/2J	724	228	950	340	440AA
235/55R17	103/XL	V	7 1/2J	690	245	875	340	440AA
235/65R17	108/XL	H	7J	738	240	1000	340	440AA
245/65R17	111/XL	H	7J	750	248	1090	340	440AA
255/60R17	106	V	7 1/2J	738	260	950	300	440AA
265/65R17	112	H	8J	776	272	1120	300	440AA
265/65R17	116 XL	H	8J	776	272	1250	340	440AA
265/70R17	115	T	8J	804	272	1215	300	440AA
275/65R17	115	H	8J	790	279	1215	300	440AA
285/65R17	116	H	8 1/2J	802	292	1250	300	440AA
235/55R18	104/XL	V	7 1/2J	715	245	900	340	440AA
255/55R18	109/XL	V	8J	737	265	1030	340	440AA
265/60R18	110	H	8J	775	272	1060	300	440AA
275/65R18	116	H	8J	815	279	1250	300	440AA
285/50R20	116/XL	V	9J	794	297	1250	340	440AA
205/70R15	100/XL	T	6J	209	669	800	340	440AA




FRC76 WINTER TIRE

Design Features



Performance Test

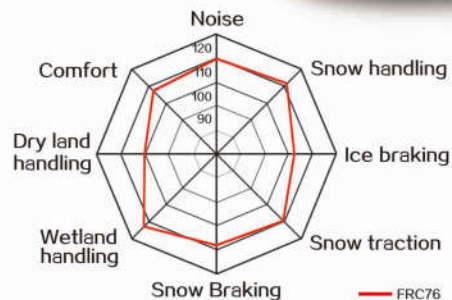

Product features

Two wide longitudinal water draining grooves enhance excellent drainage capacity, and effectively prevent tire lateral slip on rainy and snowy land.

3D winding sipe and angle design sufficiently provide grip ability, ensures the block rigidity and effectively prevent slipping on icy and snowy land.

Wide shoulder block design provide a remarkable handling and steering performance.



More silica compound greatly promote grip power on snowy land.

Crossed and single guidance pattern provide excellent drainage performance, combined with a great deal of transverse groove, greatly promote the grip performance on icy and snowy road.

Water absorbing hole design, effectively prevent the tire from slipping, knurling enhances the skid resistance during preliminary stage of tire.



FRC76 WINTER TIRE

SIZE	Load Index	Speed Rating	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)	Max. Pressure (kpa)
165/70R13	79	T	5.00B	562	170	437	300
175/70R13	82	T	5.00B	576	177	475	300
165/70R14	81	T	5J	588	170	462	300
175/65R14	82	T	5J	584	177	475	300
175/65R14	82	H	5J	584	177	475	300
175/70R14	84	T	5J	602	177	500	300
185/60R14	82	T	5 1/2J	578	189	475	300
185/60R14	82	H	5 1/2J	578	189	475	300
185/65R14	86	T	5 1/2J	596	189	530	300
185/65R14	86	H	5 1/2J	596	189	530	300
185/70R14	88	T	5 1/2J	616	189	560	300
195/60R14	86	T	6J	590	201	530	300
195/60R14	86	H	6J	590	201	530	300
195/70R14	91	T	6J	630	201	615	300
165/65R15	81	T	5J	595	170	462	300
175/65R15	84	T	5J	609	177	500	300
185/55R15	82	H	6J	585	194	475	300
185/60R15	84	T	5 1/2J	603	189	500	300
185/60R15	84	H	5 1/2J	603	189	500	300
185/65R15	88	T	5 1/2J	621	189	560	300
185/65R15	88	H	5 1/2J	621	189	560	300
195/50R15	82	H	6J	577	201	475	300
195/55R15	85	H	6J	595	201	515	300
195/60R15	88	T	6J	615	201	560	300
195/60R15	88	H	6J	615	201	560	300
195/65R15	91	T	6J	635	201	615	300
195/65R15	91	H	6J	635	201	615	300
205/60R15	91	T	6J	627	209	615	300
205/60R15	91	H	6J	627	209	615	300
205/65R15	94	T	6J	647	209	670	300
205/65R15	94	H	6J	647	209	670	300
195/55R16	87	H	6J	620	201	545	300
205/55R16	91	H	6 1/2J	632	214	600	300
205/60R16	96/XL	T	6J	652	209	710	340
205/60R16	96/XL	H	6J	652	209	710	340
215/55R16	97/XL	T	7J	642	226	730	340
215/55R16	97/XL	H	7J	642	226	730	340
215/60R16	99/XL	T	6 1/2J	664	221	775	340
215/60R16	99/XL	H	6 1/2J	664	221	775	340
215/65R16	98	T	6 1/2J	686	221	750	300
215/65R16	98	H	6 1/2J	686	221	750	300
225/55R16	95	H	7J	654	233	690	300
225/55R16	99/XL	T	7J	654	233	775	340
225/55R16	99/XL	H	7J	654	233	775	340
225/60R16	98	T	6 1/2J	676	228	750	300
225/60R16	98	H	6 1/2J	676	228	750	300
235/55R17	103/XL	H	7 1/2J	690	245	875	340
235/55R17	103/XL	V	7 1/2J	690	245	875	340
225/40R18	92/XL	V	8J	637	230	630	340




FRC78 WINTER TIRE

Design Features

Product features

Angular design for tire shoulder reduces lateral slipping. Wide tread design provides greater ground contact area and stronger grip. On ice and snow, 3D Steel sheet design of tire pattern not only reduces the thickness of the steel sheet, but also prevents the deformation of pattern block and reduces the wear, improves the wear resistance. Meanwhile, steel slit formed by the tiny steel sheet improves water absorbing capacity and grip performance. The snow tires adopts a softer tread to get more grip on uneven roads, improves the grip performance of the tire.

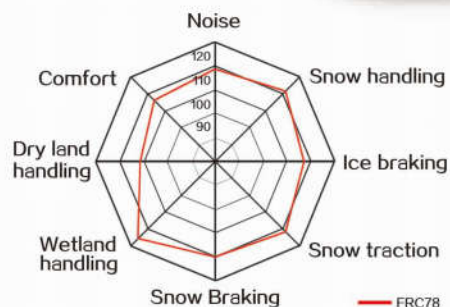

Performance Test



Four Longitudinal Grooves:

Four longitudinal grooves, with excellent drainage performance, effectively prevents lateral slipping on ice and snow.



Wide Shoulder Pattern Design:

Wide shoulder pattern design enhances the handling and steering performance.



Computer and Gene Combination Analog Design:

Computer and gene combination analog design decreases the noise to lowest with best pattern combination.



3D Twisty Sipe Pattern Design:

With optimized angle, 3D twisty sipe pattern design ensures the rigidity of pattern block, at the same time, enhances the grip and effectively prevents slipping on ice and snow.

FRC78 WINTER TIRE							
SIZE	Load Index	Speed Rating	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)	Max. Pressure (kpa)
215/75R15	100	S	6J	703	216	800	300
235/75R15	105	S	6 1/2J	733	235	925	300
215/70R16	100	T	6 1/2J	708	221	800	300
235/70R16	106	T	7J	736	240	950	300
235/60R18	107/XL	H	7J	739	240	975	340
285/60R18	120/XL	T	8 1/2J	799	292	1400	340
255/60R19	113/XL	H	7 1/2J	789	260	1150	340
265/50R19	110/XL	H	8 1/2J	749	277	1060	340
275/55R19	111	H	8 1/2J	785	284	1090	300
275/50R20	113/XL	H	8 1/2J	784	284	1150	300




FRC79 WINTER TIRE

Design Features

Product features

Angular design for tire shoulder reduces lateral slipping. Wide tread design provides greater ground contact area and stronger grip. On ice and snow, 3D Steel sheet design of tire pattern not only reduces the thickness of the steel sheet, but also prevents the deformation of pattern block and reduces the wear, improves the wear resistance. Meanwhile, steel slit formed by the tiny steel sheet improves water absorbing capacity and grip performance. The snow tires adopts a softer tread to get more grip on uneven roads, improves the grip performance of the tire.

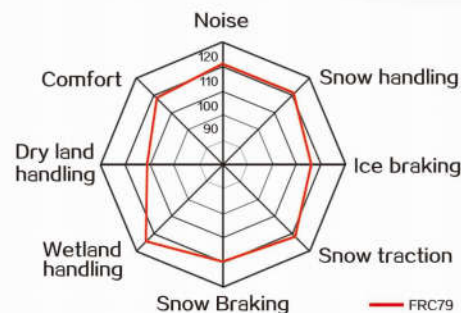

Performance Test



3D Twisty Sipe Pattern Design:

With optimized angle, 3D twisty sipe pattern design ensures the rigidity of pattern block, at the same time, enhances the grip and effectively prevents slipping on ice and snow.




Wide Shoulder Pattern Design:

Wide shoulder pattern design enhances the handling and steering performance.



Herringbone Pattern Design:

Herringbone tread design and coherent circumferential pattern rib not only improve grip but also ensure lateral handling performance on ice and snow.



Three Longitudinal Grooves:

Three longitudinal grooves, with excellent drainage performance, effectively prevent lateral slipping on ice and snow.



FRC79 WINTER TIRE

SIZE	Load Index	Speed Rating	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)	Max. Pressure (kpa)
155/65R13	73	T	4J	532	157	365	300
165/70R13	79	T	5J	562	170	437	300
165/60R14	75	T	5J	554	170	387	300
165/60R14	75	H	5J	554	170	387	300
165/70R14	81	T	5J	588	170	462	300
175/65R14	82	T	5J	584	177	475	300
175/70R14	84	T	5J	602	177	500	300
185/60R14	82	T	5J	578	189	475	300
185/60R14	82	H	5J	578	189	475	300
185/65R14	86	T	5J	596	189	530	300
195/60R14	86	T	6J	590	201	530	300
195/60R14	86	H	6J	590	201	530	300
185/60R15	84	T	5J	603	189	500	300
185/60R15	84	H	5J	603	189	500	300
185/65R15	88	T	5J	621	189	560	300
185/65R15	88	H	5J	621	189	560	300
195/60R15	88	T	6J	615	201	560	300
195/60R15	88	H	6J	615	201	560	300
195/65R15	91	T	6J	635	201	615	300
195/65R15	91	H	6J	635	201	615	300
195/70R15C	104/102	S	6J	655	201	900/850	450
195/70R15LT	99/96	S	6J	655	201	775/710	450
205/65R15	94	T	6J	647	209	670	300
205/65R15	94	H	6J	647	209	670	300
215/65R15	96	T	6J	661	221	710	300
215/65R15	96	H	6J	661	221	710	300
215/70R15	98	T	6J	680	221	750	300
205/55R16	91	H	6J	632	214	615	300
205/55R16	91	V	6J	632	214	615	300
205/60R16	96/XL	T	6J	652	209	710	340
205/60R16	96/XL	H	6J	652	209	710	340
215/55R16	97/XL	H	7J	642	226	730	340
215/65R16	98	T	6J	686	221	750	300
215/65R16	98	H	6J	686	221	750	300
215/50R17	95/XL	H	7J	648	226	690	340
215/50R17	95/XL	V	7J	648	226	690	340
215/55R17	98/XL	H	7J	668	226	750	340
215/55R17	98/XL	V	7J	668	226	750	340
215/60R17	96	T	6J	690	221	710	300
215/60R17	96	H	6J	690	221	710	300
225/50R17	98/XL	H	7J	658	233	750	340
225/50R17	98/XL	V	7J	658	233	750	340
225/55R17	101/XL	H	7J	680	233	825	340
225/55R17	101/XL	V	7J	680	233	825	340
225/60R17	99	T	6J	702	228	775	300
225/60R17	99	H	6J	702	228	775	300
225/65R17	102	T	6J	724	228	850	300
225/65R17	102	H	6J	724	228	850	300
235/55R17	103/XL	H	7J	690	245	875	340
235/55R17	103/XL	V	7J	690	245	875	340
255/45R17	102/XL	H	8J	662	255	850	340
255/45R17	102/XL	V	8J	662	255	850	340
215/55R18	99/XL	H	7J	693	226	775	340
215/55R18	99/XL	V	7J	693	226	775	340
235/50R18	101/XL	H	7J	693	245	825	340
235/50R18	101/XL	V	7J	693	245	825	340
235/55R18	104/XL	H	7J	715	245	900	340
235/55R18	104/XL	V	7J	715	245	900	340
255/40R18	99/XL	H	9J	661	260	775	340
255/40R18	99/XL	V	9J	661	260	775	340
255/55R18	109/XL	H	8J	737	265	1030	340
255/55R18	109/XL	V	8J	737	265	1030	340
235/50R19	103/XL	H	7J	719	245	875	340
235/50R19	103/XL	V	7J	719	245	875	340
245/45R19	102/XL	H	8J	703	243	850	340
245/45R19	102/XL	V	8J	703	243	850	340
255/45R19	104/XL	H	8J	713	255	900	340
255/45R19	104/XL	V	8J	713	255	900	340
255/55R19	111/XL	H	8J	763	265	1090	340
255/55R19	111/XL	V	8J	763	265	1090	340
235/55R20	105/XL	H	7J	766	245	925	340
235/55R20	105/XL	V	7J	766	245	925	340
245/45R20	103/XL	H	8J	728	243	875	340
245/45R20	103/XL	V	8J	728	243	875	340
255/45R20	105/XL	H	8J	738	255	925	340
255/45R20	105/XL	V	8J	738	255	925	340
255/50R20	109/XL	H	8J	764	265	1030	340
255/50R20	109/XL	V	8J	764	265	1030	340
255/55R20	110/XL	H	8J	788	265	1060	340
255/55R20	110/XL	V	8J	788	265	1060	340
275/45R20	110/XL	H	9J	756	273	1060	340




FRC86

ALL TERRAIN TIRE-SUV

Design Features

Performance Test

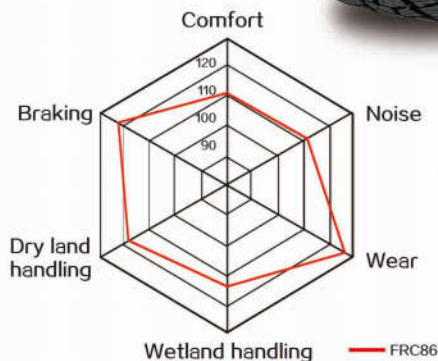

Product features




Chamfer design of the pattern:
Prevent stone nipped, enhance the ability to get rid of the stone



Wide shoulder pattern design:
Enhance the block rigidity, endurance, weight-carrying ability and steering qualities during driving.



Staggered central rib design:
Solid staggered central rib design ensures straight-line driving stability and safety.



Multi-steel strap design:
Promote the grip performance on wet and dry land, enhance the tractive performance



FRC86 ALL TERRAIN TIRE - SUV

SIZE	Load Index	Speed Rating	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
215/75R15LT	100/97	Q	6J	709	216	800/730	350	480AB
215/75R15LT	100/97	R	6J	709	216	800/730	350	480AB
225/75R15LT	108/104	Q	6J	725	223	1000/900	450	480AB
225/75R15LT	108/104	R	6J	725	223	1000/900	450	480AB
235/75R15LT	116/113	Q	6 1/2J	739	235	1250/1150	550	480AB
235/75R15LT	116/113	R	6 1/2J	739	235	1250/1150	550	480AB
30 x 9.50R15LT	104	Q	7 1/2J	756	240	900	350	480AB
31 x 10.50R15LT	109	R	8 1/2J	781	268	1030	350	480AB
31 x 10.50R15LT	109	S	8 1/2J	781	268	1030	350	480AB
205R16C	110/108	S	6J	736	208	1060/1000	450	480AB
215/70R16	100	S	6 1/2J	708	221	800	300	480AB
215/70R16	100	T	6 1/2J	708	221	800	300	480AB
215/85R16LT	110/107	Q	6J	778	216	1060/975	450	480AB
215/85R16LT	110/107	R	6J	778	216	1060/975	450	480AB
215/85R16LT	115/112	Q	6J	778	216	1215/1120	550	480AB
215/85R16LT	115/112	R	6J	778	216	1215/1120	550	480AB
225/70R16	103	S	6 1/2J	722	228	875	300	480AB
225/70R16	103	T	6 1/2J	722	228	875	300	480AB
225/75R16LT	115/112	Q	6J	750	223	1215/1120	550	480AB
225/75R16LT	115/112	R	6J	750	223	1215/1120	550	480AB
235/70R16	106	S	7J	736	240	950	300	480AB
235/70R16	106	T	7J	736	240	950	300	480AB
235/85R16LT	120/116	Q	6 1/2J	812	235	1380/1260	550	480AB
235/85R16LT	120/116	R	6 1/2J	812	235	1380/1260	550	480AB
245/70R16	107	T	7J	750	248	975	300	480AB
245/70R16	107	S	7J	750	248	975	300	480AB
245/75R16LT	120/116	Q	7J	780	248	1380/1260	550	480AB
245/75R16LT	120/116	R	7J	780	248	1380/1260	550	480AB
255/70R16	111	S	7 1/2J	764	260	1090	300	480AB
255/70R16	111	T	7 1/2J	764	260	1090	300	480AB
265/70R16	112	S	8J	778	272	1120	300	480AB
265/70R16	112	T	8J	778	272	1120	300	480AB
265/70R16LT	121/118	R	8J	784	272	1450/1320	550	480AB
265/70R16LT	121/118	S	8J	784	272	1450/1320	550	480AB
265/75R16LT	123/120	Q	7 1/2J	810	267	1550/1400	550	480AB
265/75R16LT	123/120	R	7 1/2J	810	267	1550/1400	550	480AB
275/70R16	114	S	8J	792	279	1180	300	480AB
275/70R16	114	T	8J	792	279	1180	300	480AB
285/75R16LT	126/123	Q	8J	840	286	1700/1550	550	480AB
285/75R16LT	126/123	R	8J	840	286	1700/1550	550	480AB
235/80R17LT	120/117	Q	6 1/2J	814	235	1400/1285	550	480AB
235/80R17LT	120/117	R	6 1/2J	814	235	1400/1285	550	480AB
245/70R17LT	119/116	R	7J	782	248	1360/1250	550	480AB
245/70R17LT	119/116	S	7J	782	248	1360/1250	550	480AB
245/75R17LT	121/118	Q	7J	806	248	1450/1320	550	480AB
245/75R17LT	121/118	R	7J	806	248	1450/1320	550	480AB
265/65R17	112	S	8J	776	272	1120	300	480AB
265/65R17	112	T	8J	776	272	1120	300	480AB
265/70R17	115	S	8J	804	272	1215	300	480AB
265/70R17	115	T	8J	804	272	1215	300	480AB
265/70R17LT	121/118	R	8J	810	272	1450/1320	550	480AB
265/70R17LT	121/118	S	8J	810	272	1450/1320	550	480AB
275/65R17	115	S	8J	790	279	1215	300	480AB
275/65R17	115	T	8J	790	279	1215	300	480AB
285/70R17LT	121/118	R	8 1/2J	838	292	1450/1320	450	480AB
285/70R17LT	121/118	S	8 1/2J	838	292	1450/1320	450	480AB
265/70R18LT	124/121	R	8J	835	272	1600/1450	550	480AB
265/70R18LT	124/121	S	8J	835	272	1600/1450	550	480AB




FRC96

COMMERCIAL/LIGHT TRUCK TIRE

Design Features

Performance Test

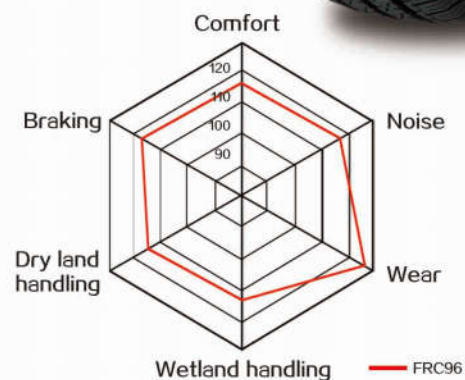

Product features

Three Longitudinal Grooves enhance water evacuation.

Special more sipes and grooves design enhances the wet grip performance.



Silent groove design decreases noise while tire rolling effectively.

Enhanced shoulder design increases driving stability with high load.



FRC96 COMMERCIAL / LIGHT TRUCK TIRE

SIZE	Load Index	Speed Rating	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)	Max. Pressure (kpa)
185R14C	102/100	S	5 1/2J	650	188	850/800	450
195R14C	106/104	S	5 1/2J	666	198	950/900	450
205R14C	109/107	R	6J	684	208	1030/975	450
215/75R14C	112/110	R	6J	678	216	1120/1060	475
195/70R15C	104/102	S	6J	655	201	900/850	450
195R15C	106/104	S	5 1/2J	693	196	950/900	450
205/70R15C	106/104	S	6J	669	209	950/900	450
215/70R15C	109/107	S	6 1/2J	683	221	1030/975	450
225/70R15C	112/110	S	6 1/2J	697	228	1120/1060	450
175/75R16C	98/96	Q	5J	668	177	750/710	375
185/75R16C	104/102	S	5J	684	184	900/850	475
195/60R16C	99/97	T	6J	640	201	775/730	375
195/65R16C	104/102	T	6J	660	201	900/850	475
195/75R16C	107/105	S	5 1/2J	698	196	975/925	475
205/65R16C	107/105	T	6J	672	209	975/925	475
205/75R16C	110/108	R	5 1/2J	714	203	1060/1000	475
215/60R16C	103/101	T	6 1/2J	664	221	875/825	375
215/65R16C	109/107	T	6 1/2J	686	221	1030/975	475
215/75R16C	113/111	S	6J	728	216	1150/1090	475
215/75R16C	116/114	R	6J	728	216	1250/1180	525
225/65R16C	112/110	T	6 1/2J	698	228	1120/1060	475
225/75R16C	116/114	S	6J	744	223	1250/1180	475
225/75R16C	121/120	R	6J	744	223	1450/1400	575
235/65R16C	115/113	T	7J	712	240	1215/1150	475